


YOUR SIGNATURE CONSTITUTES THAT YOU HAVE READ AND AGREED TO THIS SPECIFICATION SHEET AND UPON CONFIRMATION OF YOUR ORDER; THIS ITEM MAY BE NON-CANCELABLE AND NON-RETURNABLE.

Signature:

Date:

Company:

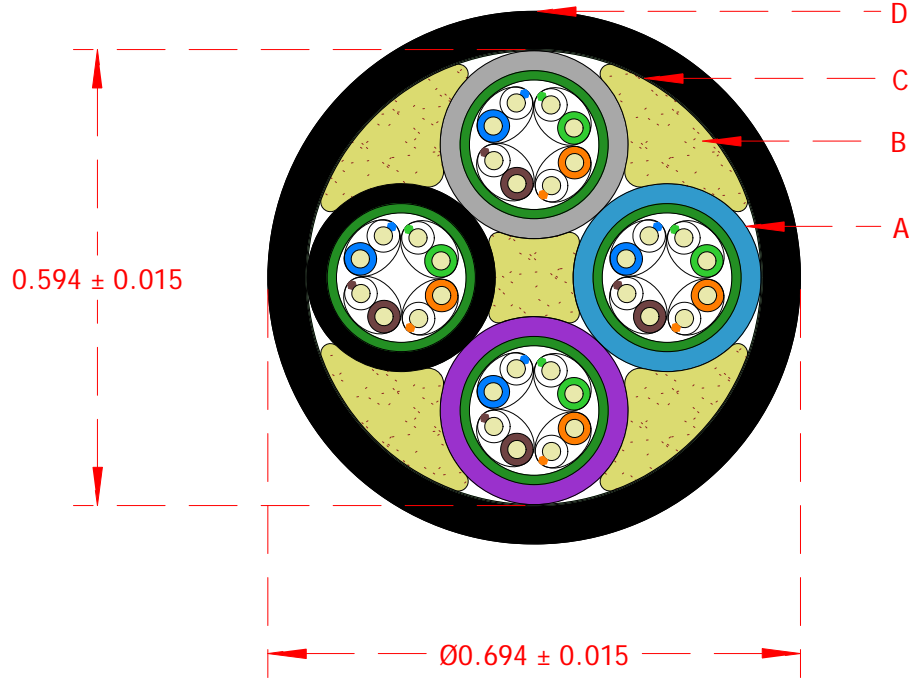

A: Four Tactical Cat5E with an Outer Thermoplastic Elastomer Jacket

Size & Stranding: 24 AWG Solid
Metal Type: Annealed Bare Copper
Nominal Wire Diameter: 0.0201

Insulation Type: Polyolefin
Nominal Insulation Thickness: 0.007
Nominal Conductor Diameter: 0.034
Color Code: White/Blue x Blue, White/Orange x Orange, White/Brown x Brown & White/Green x Green
Staggered Lay Length on each Pair per TIA/EIA Standard 568-B.2

Polyvinylchloride Inner Jacket (Colors May Vary Depending on Plant's Inventory Levels)
Thermoplastic Elastomer Outer Jacket (Black, Gray, Blue & Violet)
Nominal Cable Diameter: 0.245

Nominal Cable Lay Length: 6.50 Left Hand Lay

B: Fibrillated Polypropylene - as Necessary for a Circular Cross-Section

C: Non-Woven Tissue Wrap Binder - 100% Coverage

D: Thermoplastic Elastomer Jacket, Nominal Jacket Thickness: 0.050, Pressure Extruded, Color: Black, Temperature: -40°C to 80°C Non-UL

Legend: LAKE CABLE AVB4TCAT5E Four 24 AWG 4UTP Tactical Cat5E Made in the USA RoHS COMPLIANT

Type of Print: Silver Ink
Level Smooth Type: Level 2
Footage Markers: Yes
Ripcord: N/A



Four Tactical CAT5E Elements O/A TPE Jacket Black

All Dimensions are Shown In Inches

PROPRIETARY DOCUMENT
THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION AND MUST NOT BE REPRODUCED, DISTRIBUTED OR USED FOR MANUFACTURING WITHOUT THE WRITTEN CONSENT OF LAKE CABLE, LLC. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO AND ACCEPTANCE OF THE FOREGOING.

Third Angle Projection

Drawn By: JRV

Scale: 4 : 1

Cust. #: -

REV -

Reviewed By: -

Sheet: 1 of 1

Lake's #: AVB4TCAT5E

REV B

Cage Code: N/A

Date Created: 04/13/12

Revision

Description

Approved By

Date

B

Updated Note for Cat5 Inner Jacket Colors and New Template

JRV

10/17/16